

# Slat Belt Conveyor ILTP 50-21

## Applications

Slat belt conveyor Type ILTP 50-11 is intended for transport of unit loads such as boxes, trays, tote bins, etc.

## Description

Slat belt conveyor Type ILTP 50 -21 with slide bed for underhung drive unit.

## Max. load


100kg/m Depends on support stand pitch.

## Order example

ILTP 50 - 21 – 420 - 1000  
Type – EL - TL



Tel: +46 431 44 91 00  
[info@intersystem.se](mailto:info@intersystem.se)  
[www.intersystem.se](http://www.intersystem.se)

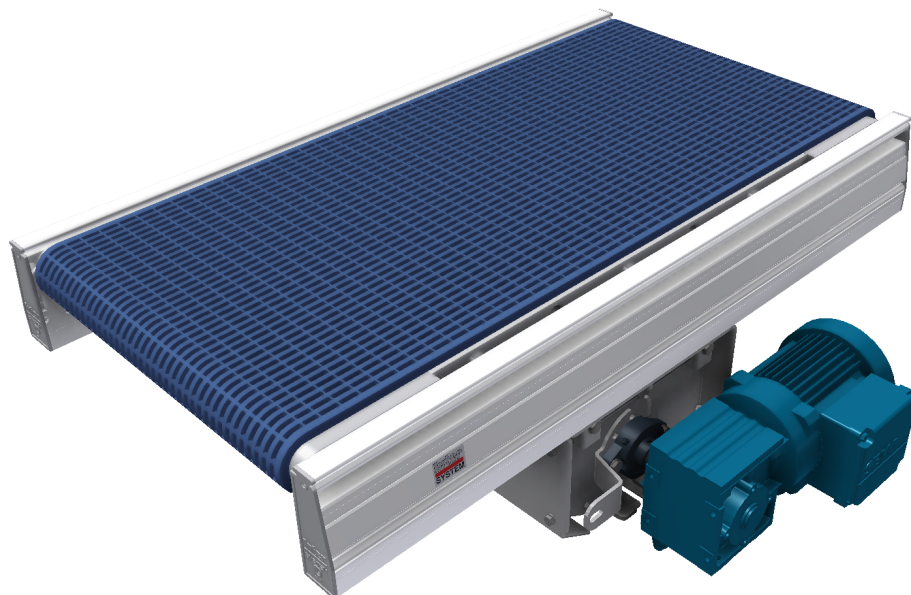

## Specification

	Material/Type	Finish	Order separately
Frame profile	Aluminium	Anodized	
Slide bed	PEHD	Smooth	
Belt	POM	Smooth	Option
Drive unit Type ILVU 50	Steel	Zinc-plated	X
Support stand Type ITBG 50	Steel/Aluminium	Zinc-plated/Anod.	X
Support stand pitch	No. of support stands/m: See diagram		
Side guide holder Type 50	Aluminium	Anodized	X

## Technical data

Internal width	EL	320, 420, 520 och 620 mm
Belt width	BB	305, 406, 508 och 610 mm
Total length	TL	600 - 6000 with 100mm increments

**INTER  
SYSTEM**

Tel: +46 431 44 91 00  
[info@intersystem.se](mailto:info@intersystem.se)  
[www.intersystem.se](http://www.intersystem.se)

